




SQD SERIES

DC POWER SUPPLIES



-  13.3 KW
-  16.6 KW
-  20 KW
-  26.6 KW
-  30 KW

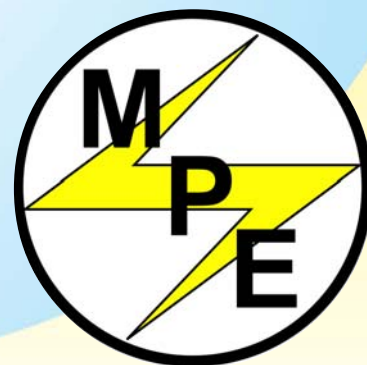

MAGNA-POWER
ELECTRONICS, INC.

SQD SERIES

HIGH-DENSITY RACK MOUNT

13.3 KW TO 30 KW DC POWER SUPPLIES

FEATURES

- 60 Models: 10 to 800 Vdc, 16 to 2700 Adc
- Series and parallel master/slave operation
- High dielectric withstand: 2500 Vac
- All user interface circuitry referenced to earth ground
- OVT and OCT shutdown standard
- Automatic V/I crossover
- RS232 interface with SCPI commands
- Optional IEEE-488, RS485, and Ethernet programming
- Front panel potentiometers for stepless rotary control
- Front panel keypad and up/down control for digital control
- 100 memory states with front panel memory indicator
- Auto sequencing by time or external triggering
- Modulation with addition or multiplication
- Front panel calibration
- User friendly controls and indicators
- Remote Interface Software with self-teaching features
- Drivers: Certified LabWindows/CVI and LabVIEW for GPIB, Serial, and TCP/IP communications
- High power factor
- CE Mark



SIZE MATRIX

POWER (kW)	SIZE (H"xW"xD")	WEIGHT
13.3	10½X19x24	195
16.6	10½X19x24	220
20.0	10½X19x24	245
26.6	15¼X19x24	340
30.0	15¼X19x24	365

SPECIFICATIONS:

Input voltage: 208/240 Vac, 50-60 Hz, 3-phase; 380/415 Vac, 50-60 Hz, 3-phase; 440/480 Vac, 50-60 Hz, 3-phase

Regulation line and load combined: 0.10%

Stability: 0.10% for 8 hours after 30 minute warm up

Transient response: 10 ms to recover within 2% of regulated output with a 30% step load change

Ambient Temperature: 0 to 50°C

External programming potentiometers: 1K full scale for output voltage, output current, over voltage, and over current shutdown

Temperature coefficient: 0.04%/°C of maximum output current

NOTES:

1. Specifications subject to change without notice.
2. Specify optional EMI filter to meet EMC requirements.
3. Other options consult factory.

OPTIONS

Custom input voltage IEEE-488 Interface USB Interface
 Custom output voltage Ethernet Interface EMI Filter

MODELS AND RATINGS

MODEL	VOLTS Vdc	AMPS Adc	RIPPLE mVrms	POWER kW
SQD10-1200	0-10	0-1200	40	13.3
SQD16-800	0-16	0-800	35	
SQD32-400	0-32	0-400	40	
SQD50-265	0-50	0-265	50	
SQD80-166	0-80	0-166	60	
SQD125-106	0-125	0-106	100	
SQD200-66	0-200	0-66	125	
SQD250-53	0-250	0-53	130	
SQD375-35	0-375	0-35	170	
SQD500-26	0-500	0-26	220	
SQD600-21	0-600	0-21	250	
SQD800-16	0-800	0-16	270	
SQD10-1500	0-10	0-1500	40	16.6
SQD16-1000	0-16	0-1000	35	
SQD32-500	0-32	0-500	40	
SQD50-330	0-50	0-330	50	
SQD80-207	0-80	0-207	60	
SQD125-133	0-125	0-133	100	
SQD200-83	0-200	0-83	125	
SQD250-66	0-250	0-66	130	
SQD375-44	0-375	0-44	170	
SQD500-33	0-500	0-33	220	
SQD600-26	0-600	0-26	250	
SQD800-20	0-800	0-20	270	
SQD10-1800	0-10	0-1800	40	20.0
SQD16-1200	0-16	0-1200	35	
SQD32-600	0-32	0-600	40	
SQD50-400	0-50	0-400	50	
SQD80-250	0-80	0-250	60	
SQD125-160	0-125	0-160	100	
SQD200-100	0-200	0-100	125	
SQD250-80	0-250	0-80	130	
SQD375-54	0-375	0-54	170	
SQD500-40	0-500	0-40	220	
SQD600-32	0-600	0-32	250	
SQD800-24	0-800	0-24	270	
SQD10-2400	0-10	0-2400	40	26.6
SQD16-1600	0-16	0-1600	35	
SQD32-800	0-32	0-800	40	
SQD50-530	0-50	0-530	50	
SQD80-332	0-80	0-332	60	
SQD125-213	0-125	0-213	100	
SQD200-133	0-200	0-133	125	
SQD250-106	0-250	0-106	130	
SQD375-71	0-375	0-71	170	
SQD500-53	0-500	0-53	220	
SQD600-42	0-600	0-42	250	
SQD800-32	0-800	0-32	270	
SQD10-2700	0-10	0-2700	40	30.0
SQD16-1800	0-16	0-1800	35	
SQD32-900	0-32	0-900	40	
SQD50-600	0-50	0-600	50	
SQD80-375	0-80	0-375	60	
SQD125-240	0-125	0-240	100	
SQD200-150	0-200	0-150	125	
SQD250-120	0-250	0-120	130	
SQD375-81	0-375	0-81	170	
SQD500-60	0-500	0-60	220	
SQD600-48	0-600	0-48	250	
SQD800-36	0-800	0-36	270	



MAGNA-POWER
ELECTRONICS, INC.

81 Fulton Street, Boonton, NJ 07005
 (973) 263-0017 FAX: (973) 263-1928
 E-mail: sales@magna-power.com
 http://www.magna-power.com

Magna-Power Electronics' **SQD SERIES** combines the best of dc power processing with multiprocessor embedded control. A combination of high and medium frequency power processing technologies improves response, shrinks package size, and reduces cost. **SQD SERIES** power supplies are current fed and are more tolerant to abusive loads than conventional switching power supplies.

SQD SERIES power supplies offer an unusual blend of both analog and digital control. Two front panel potentiometers are available to set voltage and current for stepless analog control. Alternatively, voltage, current, over voltage trip, and over current trip may be programmed through a rear connector via resistance, voltage, or current. With simple configuration changes, the **SQD SERIES** power supplies will accept keypad entries and up/down key presses for programming voltage, current, over voltage trip, and over current trip. Key strokes are kept to a minimum by a repeat last command feature. RS232 communications is embedded in the control circuitry allowing full computer control with SCPI commands. An optional IEEE-488 to RS232 converter, Ethernet to RS232 converter, and other communications converters are available to echo commands over the communications bus.

SQD SERIES power supplies can be configured through the front panel for different applications. The power supply can be programmed to have its control functions accessible from the front panel, rear connector, or through RS232 communications. Sensing can be established at the output terminal of the power supply or through a rear terminal block for sensing at the load. An external interlock can be set to enable operation only when an external connection is made. Even calibration has been simplified with front panel access to calibration digital potentiometers.

SQD SERIES power supplies incorporate an optically isolated feedback system. The result is that all user interface circuitry is reference to earth ground -- not the negative terminal of the power supply. This enables users to connect external circuitry without concern of ground loops or voltage breakdown.

SQD SERIES power supplies offer both master/slave parallel and series operation. This enables two or more power supplies to be placed in parallel for increased output current or in series for increased output voltage. With master/slave operation, power supplies operate at near equal voltage and current.

SQD SERIES power supplies can operate as a voltage source or current source depending on the control settings and load conditions. If the power supply is operating as a voltage source and the load increases to a point beyond the current command setting, the power supply automatically crosses over to current mode control and operates as a current source at that setting.

One-hundred memory states are available to program voltage, current, over voltage trip, over current trip, and time period. Set points can be auto sequenced with time or external triggering. Special programming codes allow repeating to create a power function generator. The first 10 memory states are displayed on the front panel to simplify programming tasks.

SQD SERIES power supplies have an analog input to modulate the digital programming signal. The modulator can be programmed to modulate the voltage or current command setting and to act as a multiplier or adder. The modulator can be applied to tailor the output profile by sensing output voltage or current, respond to transducers, simulate sources such as photovoltaic cells, and compensate for line drop without sense leads.

Remote Interface Software is included to provide sophisticated computer control. This software provides a virtual control panel to emulate the power supply's front panel, a command panel to send and monitor SCPI commands, a register panel to monitor registers, and a calibration panel to provide easy access to calibration digital potentiometers.

SQD SERIES power supplies have extensive diagnostic functions -- all of which when activated take command to shut down the system. Diagnostic functions include phase loss, excessive thermal conditions, over voltage trip, over current trip, fuse clearing, and program line. Program line monitors externally applied analog set point signals to insure they are within the specified range. Upon a diagnostic fault condition, main power is disconnected and the diagnostic condition is latched into memory. Pressing the clear key clears the memory. All diagnostic functions can be monitored through a rear connector. Furthermore, control functions can also be set through the rear connector to allow simultaneous control of one or more **SQD SERIES** units.

SQD SERIES supplies have three levels of over voltage/current protection: shutdown of controlling insulated gate bipolar transistors (IGBT's), disconnect of main power, and input fuses. After an over voltage/current trip condition, the supply must be reset.

SQD SERIES have push button start/stop controls. These controls are tied to a mechanical contactor which operates with the electronic switches to break the ac mains when stop is commanded. Unlike competing products, an off means both an electrical and mechanical break in the power circuit -- not a break in an electronic switch. Safety comes first at Magna-Power Electronics.

DIAGNOSTICS


LOC: interlock
 PGL: warns that a program line has opened
 PHL: indicates a problem with input voltage
 THL: indicates over-temperature
 OVT: shows over voltage protection has tripped
 OCT: shows over current protection has tripped
 FSE: warns that a fuse has cleared
 ARM: indicates power supply is ready for or operating in auto sequencing

FUNCTION KEYS

MENU: selects function
 ITEM: selects item within function
 DISPLAY: displays voltage and current setting
 ARM: arms power supply for auto sequencing through states stored in memory
 MEM: sets memory
 CLEAR: clears setting or resets fault condition
 ▲: up
 ▼: down

MODE, SETUP, DISPLAY

POWER: indicates power output
 STANDBY: indicates control power only
 REM SEN: indicates remote sense
 INT CTL: front panel controls enabled
 EXT CTL: external controls enabled
 ROTARY: potentiometer voltage/current control
 KEYPAD: keypad voltage/current control
 EXT PGM: external voltage/current control
 REMOTE: RS232 control enabled

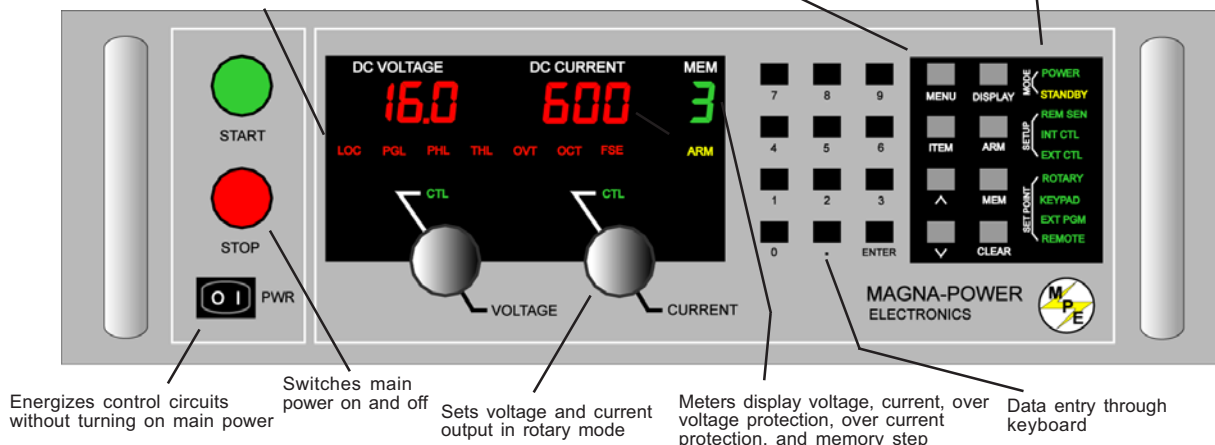


SQD SERIES

MODULAR SIMPLICITY!

OUTLINE DRAWINGS AND ELECTRICAL INTERFACE

FRONT PANEL

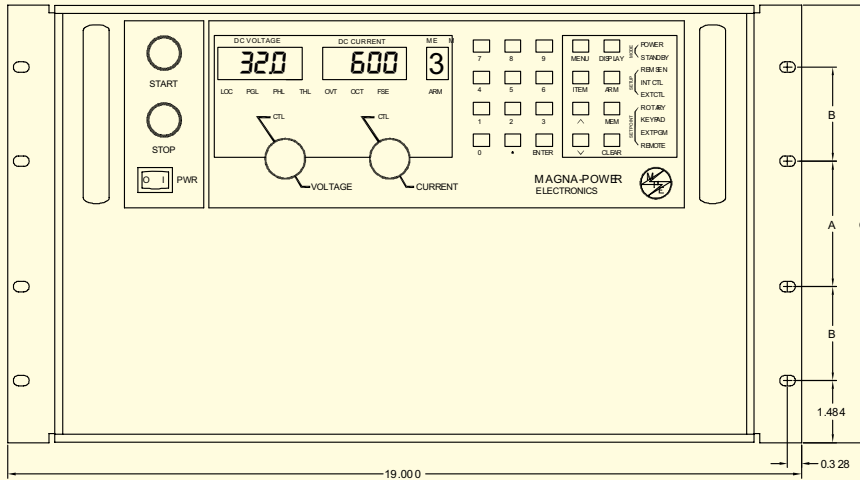


DIMENSIONS (IN)

POWER	A	B	C
13.3 KW	3.000	2.250	10.469
16.6 KW	3.000	2.250	10.469
20.0 KW	3.000	2.250	10.469
26.6 KW	4.750	4.000	15.719
30.0 KW	4.750	4.000	15.719

3/8-16 THREADED INSERT
2 PLC'S 20 KW UNITS
4 PLC'S 30 KW UNITS

REAR PANEL

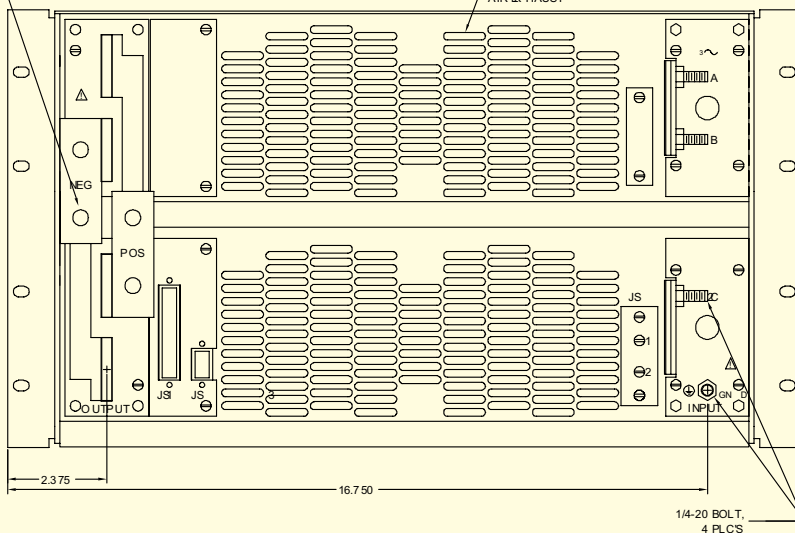

CONNECTOR JS

TERM	PARAMETER	TERM	PARAMETER
1	REF GND	20	REF GND
2	REF GND	21	REF
3	VREF EXT	22	IREF EXT
4	TVREF EXT	23	TREF EXT
5	VO2	24	IO2
6	REF CAL	25	VMOD
7	GND	26	+5
8	POWER	27	PGM LINE
9	THERMA	28	STAN DBY
10	INTERLOCK	29	PHASE LOSS
11	CUR CTL	30	VOLT CTL
12	STANDBY/ALM	31	RESERVE
13	ALM	32	OCT
14	EXT CTL	33	INT CTL
15	FUSE	34	OUT
16	RESERVE	35	RESERVE
17	START	36	ARM
18	CLEAR	37	INTERLOCK SET
19	STOP		

CONNECTOR JS1

TERM	PARAMETER
1	NC
2	RX
3	TX
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	NC

CONNECTOR JS2

TERM	PARAMETER
1	VO1REM-
2	VO1REM+

SIDE PANEL

